


1.Belt S. 06

Pitch 6,25 mm



S. 06-401

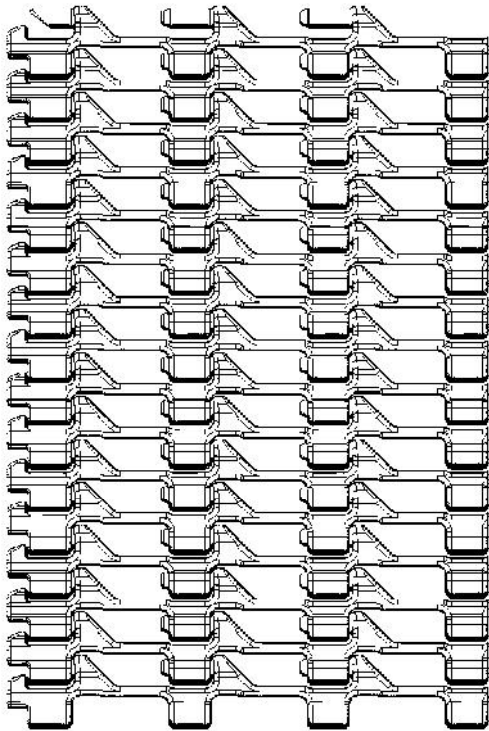

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyacetal (POM)	Min. 250	2,8

Belt surface: Open belt with a smooth surface.
Open area: 40%. Biggest opening 4 x 8 mm.
Strength: Ideal choice for light transportation.
Material/colour: POM/NAT
Cleanability: Excellent. FSIS
Accessories:
Application: Transport of products that require a very small transfer, runs on 7 mm nose bar. FDA approved
Standard widths: Increments of 40 mm, e.g. 200 mm, 240 mm.

Registered Trademark ®

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside-diameter		Round bore		Square bore	
					mm	in.	mm	in.
20	44	39	35	6	20		25	
36	74	69	65	6	20/25		25	
48	96	91	87	6	20/25		25/40	

Other sprockets are available upon request

