
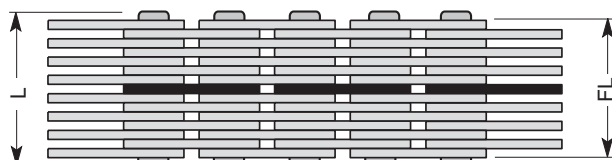
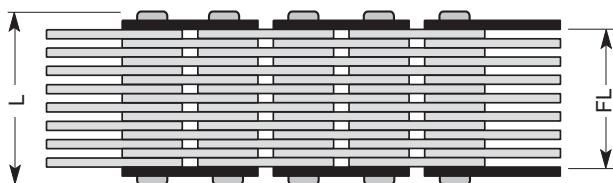
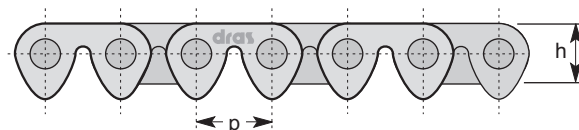


# CATENE SILENZIOSE

## CONVEYOR SILENT CHAINS

ANGOLO DENTE 60° / TOOTH ANGLE 60°

p = 3/8" - 1/2" - 5/8" - 1"

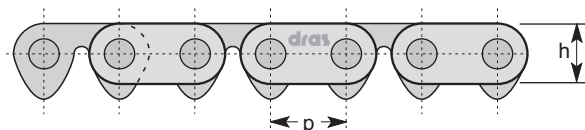

### GUIDA LATERALE / LATERAL GUIDE

p	FL*	L	CR	Ps	
inch	mm	mm	mm	daN	kg
3/8"	9,525	20,0	25,0	2500	1,200
3/8"	9,525	22,8	27,8	2800	1,360
3/8"	9,525	25,5	30,5	3000	1,500
3/8"	9,525	28,1	33,1	3300	1,680
3/8"	9,525	31,0	36,0	3700	1,860
3/8"	9,525	36,0	41,0	4300	2,150
1/2"	12,7	14,0	19,6	1500	1,050
1/2"	12,7	17,0	22,6	1785	1,275
1/2"	12,7	23,2	28,8	2440	1,740
1/2"	12,7	29,2	34,8	3060	2,190
1/2"	12,7	35,2	40,8	3696	2,640
1/2"	12,7	38,3	43,9	4000	2,970
5/8"	15,88	25,0	31,8	4000	1,870
5/8"	15,88	29,0	35,8	4640	2,180
5/8"	15,88	36,7	43,5	5870	2,700
5/8"	15,88	43,0	49,8	4880	3,200
5/8"	15,88	71,0	77,8	11360	5,300
5/8"	15,88	89,5	96,3	14320	6,700

### GUIDA CENTRALE / CENTRAL GUIDE

p	FL	L	CR	Ps	
inch	mm	mm	mm	daN	kg
3/8"	9,525	12,3	14,7	1100	0,670
3/8"	9,525	15,0	17,4	1350	0,825
3/8"	9,525	17,5	20,0	1570	0,960
3/8"	9,525	20,2	22,6	1800	1,100
3/8"	9,525	23,5	25,4	2050	1,375
3/8"	9,525	25,5	29,9	2300	1,400
1/2"	12,7	14,0	16,6	1400	0,840
1/2"	12,7	17,0	19,6	1700	1,020
1/2"	12,7	26,5	29,0	2650	1,590
1/2"	12,7	29,5	32,0	3000	1,770
1/2"	12,7	38,5	41,0	3800	2,310
1/2"	12,7	41,5	44,0	4200	2,490
5/8"	15,88	28,5	31,5	4275	1,700
5/8"	15,88	32,5	35,5	4875	1,950
5/8"	15,88	40,0	43,5	6000	2,400
5/8"	15,88	51,5	54,5	7720	3,000
5/8"	15,88	74,2	77,2	11130	4,450
5/8"	15,88	93,0	96,0	12970	5,580

p: Passo / pitch

FL: Fascia di lavoro / width

L: Ingombro sui perni / width of pins

CR: Carico di rottura / breaking load

Ps: Peso Kg/mt / weight Kg/mt

A richiesta esecuzione INOX e fasce di lavoro diverse\*

On request INOX execution and different widths\*.



Le misure sono espresse in mm. / Dimensions are expressed in mm.